

APPLYING MIXED INTEGER PROGRAMMING FOR GREEN SUPPLY CHAIN MANAGEMENT

A. Sadegheih^{1*}, D. Li², S. Sribenjachot³ and P.R. Drake⁴

¹Department of Industrial Engineering
Yazd University, Yazd, Iran
sadegheih@yazduni.ac.ir

²⁻⁴Operations Management and e-Business Group Division
University of Liverpool, Management School, Liverpool, UK
dong@liverpool.ac.uk, n_nicky2@hotmail.com, Drake@liverpool.ac.uk

ABSTRACT

This paper aims to guide those in supply chain management who make decisions on selecting factories, transportation modes, and the number of products to be manufactured. Solutions can be found through development of an optimisation model, using mixed-integer programming. Because green supply chain issues have become important, and new legislation has to be taken into account, carbon emissions costs must be included in the total costs of the supply chain, as in the optimisation model presented, which then has the ability to minimise total costs and to provide solutions that are both cost-effective and environmentally friendly.

OPSOMMING

Die doel van hierdie artikel is om leiding te verskaf aan diegene in voorsieningsketting-bestuur wat besluite neem aangaande die keuse van fabriek, vervoermetodes en die aantal produkte om te vervaardig. Oplossings kan gevind word by wyse van 'n optimiseringsmodel wat gemengde-heelstalprogrammering gebruik. Aangesien "groen" of te wel omgewingsvriendelike aspekte belangrik geword het en nuwe wetgewing in ag geneem moet word, moet die koste van koolstofemissies in die totale koste van die voorsieningsketting in berekening gebring word, soos wat in die optimiseringsmodel wat voorgehou word inderdaad gebeur. Sodoende kan 'n oplossing gevind word wat nie alleen koste-effektief is nie, maar ook omgewingsvriendelik.

*Corresponding author

1. INTRODUCTION

The problem of network configuration is one of specifying the structure through which products will flow from their source points to demand points. This involves determining: what facilities, if any, are to be used; how many there should be; where they should be located; which products and customers should be assigned to them; which transport services should be used between them; and how the facilities should be served.

It is well known that global warming has become a serious threat, potentially causing disasters such as extreme weather changes, heat waves, severe storms, etc. It is obvious that reducing carbon emissions from transportation would help to reduce it in all sectors. However, emissions from the transportation sector show a tendency to increase continuously. Thus various changes in supply chains will definitely occur in the future, corresponding to new legislation, and transportation will increasingly play a crucial role in reducing carbon emissions [9]. Carbon trading, promoted in terms of the Kyoto Protocol as an environmentally friendly means of pollution control [1], is said to be the best way to help reduce carbon emissions, and will be one focus of this study.

2. LOGISTICS AND NETWORKS

Logistics is the function responsible for moving materials through supply chains, where a supply chain is the series of activities and organisations through which materials move on their journey from initial suppliers to final customers. In recent years, organisations have begun to appreciate the importance of logistics, recognising it as an essential function with an obvious impact on strategic performance. Logistics management is essentially an integrative process that seeks to optimise the flows of materials and supplies through the organisation and its operations to the customer. Logistics has always been central to, and essential for, economic activity. Decisions about transportation involve mode selection, shipment size, and routing and scheduling. These decisions are influenced by the proximity of warehouse to customers and plants, which, in turn, influence warehouse location. Transport decisions also affect inventory levels through the size of shipments; and transportation is a significant component of the costs incurred by most supply chains.

In terms of supply chain management, transportation involves movement of the product at the starting point of the supply chain to customers. Transportation can be said to be very significant in the supply chain, because almost all the products are manufactured and consumed in different locations. Moreover, transportation is also a significant cost factor in the supply chain.

It also plays a crucial role in global supply chains. For example, products can be moved and delivered to customers all over the world, although a company may only have a few manufacturing factories. This can be achieved by global transportation. Developed or industrialised societies are characterised by transportation efficiency [23-25].

Supply chains use a combination of transportation modes: road, rail, air, and water. Intermodal services are available to provide special services that cannot be achieved by single transportation services. The effectiveness of any mode of transport is affected by the carrier's investment in equipment and operating decisions, as well as available infrastructure and transportation policies. Environmentally, road transportation is said to be one of the main surface transport sectors emitting CO₂ [27].

Airlines have a high fixed cost in infrastructure and equipment. Labour and fuel costs are largely trip-related, and independent of the number of passengers or amount of cargo carried on a flight. An airline's goal is to maximise the daily flying time of a plane and the revenue generated per trip. Because a high level of services and global shipments are increasingly needed, air transport is playing an increasingly important role in distribution in certain parts of the supply chain.

Water transport is ideally suited for carrying very large loads at low cost, and is used for these reasons. Water transport has different levels of movement limitation, which depend on the availability of waterways [24].

Key issues in the intermodal industry involve the exchange of information to facilitate shipment transfers between different modes, because these transfers often involve considerable delays, reducing delivery time performance. Managers must use information technology to decrease costs and improve responsiveness in their transportation networks (see Tables 1 and 2). Software helps managers with transportation planning, modal selection, and building delivery routes and schedules. Available technology allows carriers to identify the precise location of each vehicle, as well as the shipments it carries. These technologies help carriers to lower costs and become more responsive to changes.

The main benefits of emissions trading in the transport sector are: a reduced impact on climate change; reduced local air pollution; reduced congestion; an increased trend towards localisation; improved health and fitness; enhanced community spirit; increased use of public transport; and an increased uptake of clean fuels and vehicles [28].

Economic characteristics of network modes	Road	Rail	Air	Water
Fixed costs	Low	High	Low	Moderate
Variable costs	Moderate	Low	High	Low
Market coverage	Point to point	Terminal to terminal	Terminal to terminal	Terminal to terminal
Degree of competition	Many	Few	Moderate	Few
Predominant type of traffic	All types	Moderately low value, moderately high density	High value, moderately low density	Low value, high density
Average length of haul (in kilometres)	350	1600	330	376 to 1,367
Equipment capacity (tonnes)	10 to 25	150 to 1,200	5 to 125	1,000 to 60,000

Table 1: Comparison of network modes (economic characteristics)

Service characteristics of network modes	Road	Rail	Air	Water
Speed (time-in-transit)	Moderate to fast	Moderate	Fast	Slow
Availability	High	Moderate	Moderate	Low
Reliability	high	Moderate	High	Low to moderate
Loss and damage	Low	Moderate	Low	Low to moderate
Flexibility	High	Moderate	Moderate to high	Low to moderate

Table 2: Comparison of network modes (service characteristics)

3. SUPPLY CHAIN MANAGEMENT

This review of the literature divides transportation in the supply chain into four major modes - road, rail, air, and water transportation - and explains the performance and difference between transportation modes. Furthermore, this review surveys a range of research related to the use of MIP in supply chain management. Therefore a design network and mode of transportation optimisation model must be created, taking carbon emissions trading into consideration. Its direct benefit is that it lowers the total costs, and its indirect benefit is that it addresses environmental issues, especially problems of global warming.

The optimisation model is developed by using mixed-integer programming. Its structure can be divided into two parts: the objective function, and constraints. The objective function, equation (1), refers to the purpose of the model, which focuses on minimising total costs made up by production costs, fixed costs from factories, fixed and variable transportation costs, carbon emission costs, and opportunity costs. The constraints comprise demands, capacity, and material flows. The designed objective function (1) and constraints (2-7) can be written as the equations shown below:

Objective function:

$$\begin{aligned} \text{Min}C = & \sum_{p=1}^D \sum_{i=1}^m \sum_{j=1}^n PC_i X_{ijp} + \sum_{i=1}^m FF_i Y_i + \sum_{i=1}^m \sum_{p=1}^D \sum_{j=1}^n FC_{ijp} Y_{jp} + \sum_{p=1}^D \sum_{i=1}^m \sum_{j=1}^n OP_{ijp} X_{ijp} \\ & + \sum_{p=1}^D \sum_{i=1}^m \sum_{j=1}^n (TC_{ijp} + CC_{ijp}) X_{ijp} \end{aligned} \quad (1)$$

In order to give a description of each component in the objective function, the production costs component refers to the price per unit of products ordered from factories. Fixed transportation costs involve expenses (e.g. handling costs) that are never changed, no matter how many products are delivered from factories; whereas variable transportation costs are product volume-varying costs (e.g. rising fuel costs). Opportunity costs mean the calculated expenditure when the other best choices have passed through the decision-making process. For example, rail transportation is selected for its low costs, but it is slower than lorries. This forces companies to keep their stocks a little longer while they wait for product delivery. The last component of the objective function is carbon emissions costs, which are incurred by purchasing carbon emissions credits.

As for the constraints, equation (2) simply indicates that all the products delivered from the factories must be equal to the demand.

$$\sum_{j=1}^n \sum_{i=1}^m X_{ijp} = D_p \quad p = 1, \dots, D \quad (2)$$

Equation (3) means that none of the factories can supply more than their capacity.

$$\sum_{p=1}^D \sum_{j=1}^n X_{ijp} \leq Z_i Y_i \quad i = 1, \dots, m \quad (3)$$

Equation (4) involves each mode of transportation not being able to exceed its capacity.

$$\begin{aligned} \sum_{i=1}^m X_{ijp} \leq K_{jp} Y_{jp} \quad j = 1, \dots, n \\ p = 1, \dots, D \end{aligned} \quad (4)$$

For equation (5), the number of products shipped must be in a positive range.

$$\begin{aligned}
 X_{ijp} \geq 0 \quad & i = 1, \dots, m \\
 & j = 1, \dots, n \\
 & p = 1, \dots, D
 \end{aligned} \tag{5}$$

Equations (6) and (7) specify that each transportation mode and factory respectively is either open or closed. These two constraints are used as a binary variable.

$$\begin{aligned}
 Y_{jp} \in \{0,1\} \quad & j = 1, \dots, n \\
 & p = 1, \dots, D
 \end{aligned} \tag{6}$$

$$Y_i \in \{0,1\} \quad i = 1, \dots, m \tag{7}$$

4. RESULTS FROM MODEL

The problem is resolved by using the Solver Parameter in Microsoft® Excel®. The first step of the calculation is to assume values for all the parameters to be calculated in the objective function and constraints. Figure 1 shows the flow chart of the transportation problem.

The results indicate that the best way to deliver 30,000 units of products to factory A is (1) delivering 19,000 units of products from factory A using road and rail transport, and (2) delivering 11,000 units of products from factory B using port and rail transport. The minimised total costs and the carbon emission, opportunity, variable, fixed transportation, and production costs are €84,540, €9,070, €14,540, €9,180, €1,050, and €50,700 respectively (see Table 3).

The carbon emission costs are shown to be 11%, opportunity costs 17%, variable transportation 11%, fixed transportation 1%, and production costs 60% of the total costs respectively. The traditional approach refers to a general procedure to select transportation modes and factories to deliver products, in this case to a wholesaler. The wholesaler ordered 30,000 product units from three factories (A, B, and C). Lorries were used to deliver 10,000 units from factory A. Factory B was also ordered to deliver 10,000 units to the wholesaler, but used rail transportation. The other 10,000 units were delivered from factory C by waterways and rail. The results of the traditional procedure show total costs of €82,990: production cost €52,000, fixed transportation cost €1490, variable transportation cost €12,100, and opportunity cost €17,400. No carbon emissions costs were incurred because carbon emissions were not considered in this case (see Table 4). However, the new legislation regulating carbon emissions has to be included in the transportation sector. From the literature review, it can be seen that many carbon emissions schemes have been proposed. This paper assumes the carbon emissions costs come from purchasing carbon permits from other companies that have extra credits. Thus, carbon emissions costs become part of the total cost, and increase it. The calculations in this case refer to the traditional procedure that takes a new factor - carbon emissions costs - into consideration. It can be seen that the total costs increase to €98,090 owing to the new legislation aimed at reducing the carbon emitted into the atmosphere. Of this total, carbon emissions costs are €15,100, or roughly 15% of the total cost (see Table 5).

Owing to the increase in total cost, companies must find a new approach to making decisions about carbon emissions costs. This new approach is the optimisation model, which leads to changes in the decision-making process: 19,000 units go from factory A by lorry and railroad, 11,000 units go from factory B by waterways and railroads, leading to a decrease in total cost from €98,090 to €84,540 - a saving of €13,550. It is evident that the optimisation model can help to reduce total transportation costs by 13.8%.

In order to study the tendency to make decisions in the light of changes in carbon emissions costs, reductions and increases to the carbon emissions costs by ±5%, ±10%, ±20%, and ±30%

respectively are applied to the optimisation model (see Table 6). The major reason is that unstable carbon prices are predicted; so studying this expected situation by expanding the range of carbon emissions costs helps us to understand the impact on the decision-making process in supply chains.

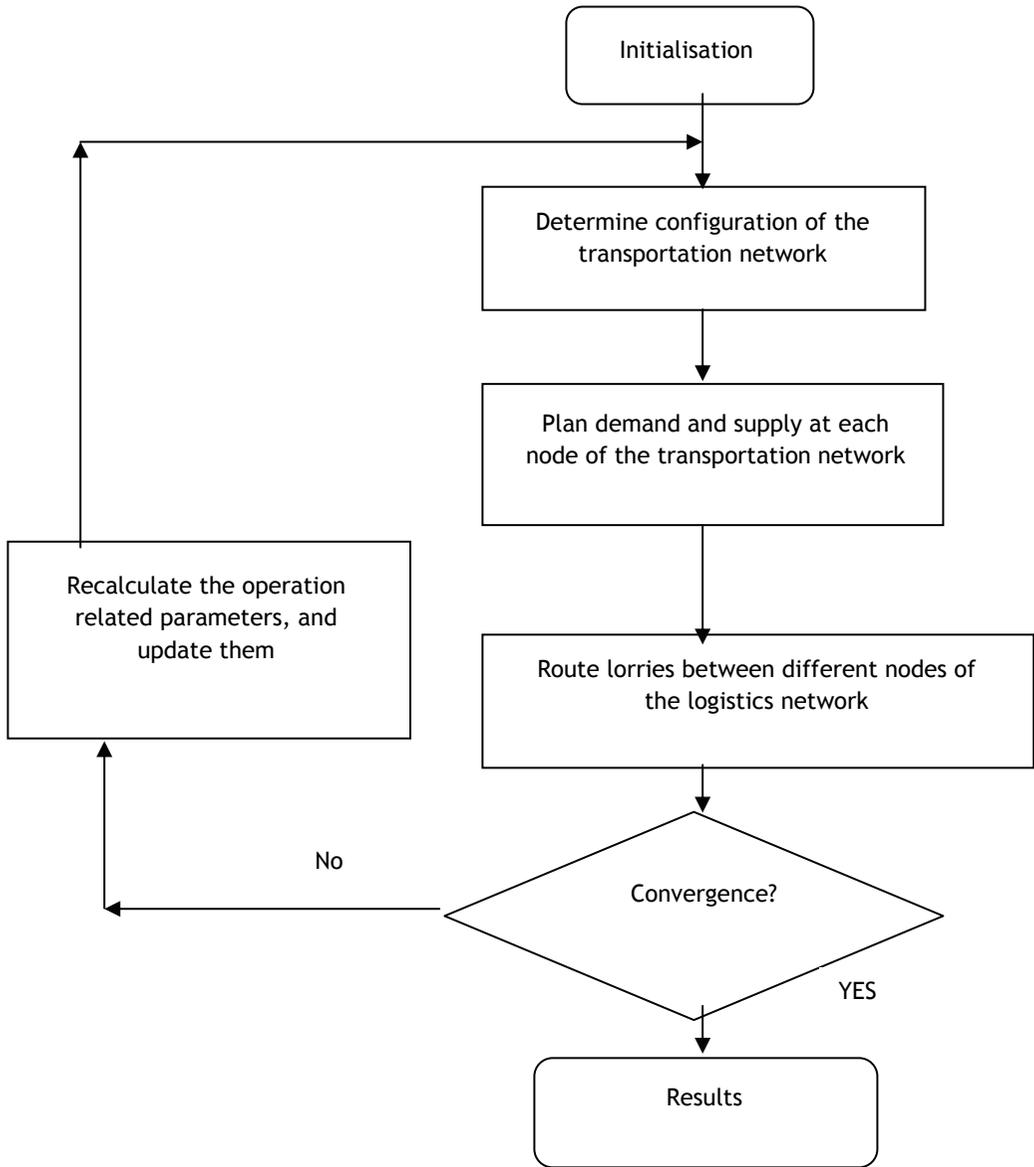


Figure 1: Flow chart of the transportation problem

Despite the changing costs of carbon emissions, the decision to select the factories, the number of products, and transportation modes stays the same as in the optimisation model. It can be seen that changes to the total costs correspond only to the increase and decrease in carbon emissions costs. However, it is necessary to obtain further results, in case the carbon emissions costs increase dramatically.

The penalty charge of €40 per tonne of carbon was indicated in the first phase of the EU-ETS (European Union Emission Trading Scheme), and €100 per tonne of carbon in the second phase. The current carbon prices are €22 to €25 per tonne of carbon. The penalty charge for carbon emissions is 100% higher than the market prices for phase I, and about 300% higher for phase II. So this research will increase the carbon emissions costs by 100% and 300% in order to see whether or not the decisions will be impacted. The transportation modes and factories selected are the same as those in the optimisation model when the carbon emissions costs increase by 100%. However, the number of products is reduced from 19,000 to 12,000 units for factory A, and increased from 11,000 to 18,000 for factory B. Moreover, after the carbon emissions costs increase by 300%, both the transportation modes and the factories selected to deliver products are changed.

The intermodal transportation of waterways and railroads is selected to deliver 12,000 units of products from factory C, and 18,000 units of products from factory B. Now it can be seen that the decision is changed when the carbon emissions costs increase by 100% or more. Thus it can be concluded that decisions can be dramatically affected by changing only one factor, in this case the carbon emissions costs (see Tables 7 and 8). This situation may arise in the future; the demand for carbon permits may be higher than the supply because only a few carbon permits may be traded in the markets. In this case many firms will incur the penalty charge owing to the shortage of carbon permits. In terms of environmental impact on logistics and supply chain management, when carbon emissions trading is implemented, the costs of industrial development will increase because of the investment in new types of green technology to reduce carbon emissions. Furthermore, implementing the carbon emissions trading schemes results in new business strategies, because environmental issues are included in decision-making processes by considering the environmental impact of proposed actions and alternatives to those actions. The energy costs, taxes, legislation, demands, etc. are all factors that contribute to carbon emissions strategies and decision-making processes.

The approach to reducing carbon emissions can require companies to adapt themselves strategically to environmental issues. Carbon emissions reduction strategies can be beneficial because they encourage companies to analyse the solutions to green issues. Integrating environmental issues into decisions made in all parts of supply chains opens the way to sustainable development. This principle has been widely adopted in many countries, and firms have launched a voluntary integration of environmental concerns into the operational levels of supply chain management. Environmental Impact Assessments (EIA) have been increasingly integrated into organisational policies to analyse and identify possibly significant impacts of logistics and supply chains on the global environment [29-31].

In supply chain management, there are further factors such as procedures to measure and calculate transportation emissions. There are many factors that contribute to decreasing demands for transportation, most of which are related to rising fuel costs. This means that configurations of production and distribution can reduce the demand for freight transport. Relocating facilities leads to carbon reduction. Reducing carbon emissions from the transportation sector can be achieved by increasing the energy efficiency of transport operations. In the transportation sector, engine efficiency, motorways, driving behaviours, speeds, tyre pressures, and wind speed and direction are all important factors that contribute to energy consumption. However, these factors are affected by increasing fuel prices. Operations of freight transports have been developed over many years to reduce costs. Nowadays, environmental issues have become part of operational decision-making processes, which can be seen in the integration of energy efficiency policy in organisations. This allows companies to improve their operational transport processes. Moreover, fully or partially changing modes of transportation can also reduce carbon emissions.

Factory	Quantity	Mode of network
A	19,000	Road+Rail
B	11,000	Port+Rail
C	-	-
Costs		EUR
Production cost		50,700
Fixed cost		1,050
Variable cost		9,180
Carbon emission cost		9,070
Opportunity cost		14,540
Total cost		84,540

Table 3: Decisions and results of the mixed integer programming

Factory	Quantity	Mode of network
A	10,000	Road
B	10,000	Rail
C	10,000	Port+Rail
Costs		EUR
Production cost		52,000
Fixed cost		1,490
Variable cost		12,100
Opportunity cost		17,400
Total cost		82,990

Table 4: Decisions and results of traditional approach

Factory	Quantity	Mode of network
A	10,000	Road
B	10,000	Rail
C	10,000	Port+Rail
Costs		EUR
Production cost		52,000
Fixed cost		1,490
Variable cost		12,100
Carbon emission cost		15,100
Opportunity cost		17,400
Total cost		98,090

Table 5: Results of traditional procedure including carbon emissions costs

Costs	-30%	-20%	-10%	-5%	MIP	5%	10%	20%	30%
Production costs	50,700	50,700	50,700	50,700	50,700	50,700	50,700	50,700	50,700
Fixed costs	1,050	1,050	1,050	1,050	1,050	1,050	1,050	1,050	1,050
Variable costs	9,180	9,180	9,180	9,180	9,180	9,180	9,180	9,180	9,180
Carbon emission costs	6,349	7,256	8,163	8,617	9,070	9,524	9,977	10,884	11,791
Opportunity costs	14,540	14,540	14,540	14,540	14,540	14,540	14,540	14,540	14,540
Total Costs	81,819	82,726	83,633	84,087	84,540	84,994	85,447	86,354	87,261

Table 6: Calculated results after changing carbon emissions costs

Factory A transport mode	MIP	100%	300%
Road	-	-	-
Rail	-	-	-
Road + Rail	19,000	12,000	-
Port + Road	-	-	-
Port + Rail	-	-	-
Factory B transport mode	MIP	100%	300%
Road	-	-	-
Rail	-	-	-
Road + Rail	-	-	-
Port + Road	-	-	-
Port + Rail	11,000	18,000	18,000
Factory C transport mode	MIP	100%	300%
Road	-	-	-
Rail	-	-	-
Road + Rail	-	-	-
Port + Road	-	-	-
Port + Rail	-	-	12,000

Table 7: Selections of transportation MIP modes and factories in cases of penalty charge

Costs	MIP	100%	300%
Production cost	52,000	48,600	49,800
Fixed cost	1,050	1,050	700
Variable cost	9,180	8,340	7,170
Carbon emission cost	9,070	16,320	24,960
Opportunity cost	14,540	19,020	25,260
Total cost	84,540	93,330	107,860

Table 8: Calculated results in cases of the penalty charge

5. CONCLUSIONS

This paper has highlighted the vast potential for tradable permit schemes in order to achieve significant and vital reductions in greenhouse gas emissions. In addition, the alternative approaches investigated appear unlikely to deliver similar or better results than an emissions trading scheme.

Several approaches to emissions trading were investigated. Various strengths and weaknesses were identified among the various options. Inevitably in an emissions trading scheme, there are trade-offs between the key issues of acceptability, equity, efficiency, and cost. These issues become more or less apparent depending on the system design, in terms of scope, permit allocation, and monitoring processes and efficiency.

The various carbon emission control methods are tax models; trading schemes; fuel systems; traffic control systems; political acceptability control costs; global climate change policy; improving vehicle maintenance standards; reduced emissions standards; global and local emissions; lowering demands for transport; global sourcing; supply chain and logistics network design; environment integration into decision-making processes; and improvement

of energy efficiency. In this case, new green developments need to be included in the supply chain management. The design optimisation model falls into this approach because it includes carbon emissions costs, allowing companies to obtain cost-effective and environmentally friendly solutions. This demonstrates why the transportation design model under the carbon emissions trading programme, using mixed-integer programming, has been developed in this paper. The value of this research is that it allows companies to make the best decisions in selecting the modes of transport, the number of products, and which factories to use. The solutions are achieved by minimising the total costs, including carbon emissions costs; and those decisions are cost-effective and environmentally friendly.

As a result of this study, when carbon emissions costs are considered among the financial burdens, the decisions of the optimisation model produce lower total costs compared with the traditional procedure. Furthermore, in the event that carbon emissions costs are expanded beyond a small range, making carbon emissions market prices unstable, the decisions are not affected. But the decisions will necessarily change if companies face penalty charges, which represent a dramatic increase in carbon emissions costs. It can therefore be concluded that carbon emissions costs affect the decision-making process.

NOTATIONS:

i : Factories index

j : Transportation modes index

n : Number of transportation modes

m : Number of factories

p : Wholesaler index

D : Number of wholesaler

X_{ijp} : Quantity shipped from factory i to wholesaler p by using mode j

Y_{jp} : 1 if transportation mode j to wholesaler p is open, 0 otherwise

Y_i : 1 if factory i is open, 0 otherwise

PC_i : Unit production cost from factory i

FC_{ijp} : Fix transportation cost from factory i to wholesaler p by using mode j

TC_{ijp} : Unit variable transportation cost from factory i to wholesaler p by using transportation mode j

CC_{ijp} : Unit carbon emission cost from factory i to wholesaler p by using transportation mode j

OP_{ijp} : Unit opportunity cost from factory i to wholesaler p by using transportation mode j

D_p : Demand at wholesaler p

K_{jp} : Potential capacity of transportation mode j to wholesaler p

Z_i : Potential capacity of factory i

FF_i : Fixed cost from factory i

ACKNOWLEDGEMENTS

This research was supported by the Universities of Yazd (Iran) and Liverpool (UK).

6. REFERENCES

- [1] Decanio, S.J. 1992. International cooperation to avert global warming: Economic growth, carbon pricing, and energy efficiency, *The Journal of Environment and Development*, 1, pp 41-62.
- [2] Metcalf, G.E. 2007. Corporate tax reform paying the bills with a carbon tax, *Public Finance Review*, 35, pp 440-459.
- [3] Lutter, R. & Shogren, J.F. 2002. Tradable permit tariffs: How local air pollution affects carbon emissions permit trading, *Land Economics*, 78, pp 159-170.
- [4] Babiker, M.H., Criqui, P., Ellerman, A.D., Reilly, J.M. & Viguier, L.L. 2003. Assessing the impact of carbon tax differentiation in the European Union, *Environmental Modelling and Assessment*, 8, pp 187-197.
- [5] Herber, B.P. & Raga, J.T. 1995. An international carbon tax to combat global warming: An economic and political analysis of the European Union proposal, *The American Journal of Economics and Sociology*, 54, pp 257-267.
- [6] Spru, S.S. 2003. Carbon trading in the policy mix, *Oxford Review of Economic Policy*, 19, pp 420-437.
- [7] Monni, S., Syri, S., Pipatti, R. & Savolainen, I. 2007. Extension of EU emissions trading scheme to other sectors and gases: Consequences for uncertainty of total tradable amount, *Water Air and Soil Pollution: Focus*, 7, pp 529-538.
- [8] Reilly, J., Mayer, M. & Harnisch, J. 2002. The Kyoto Protocol and non-CO₂ greenhouse gases and carbon sinks, *Environmental Modelling and Assessment*, 7, pp 217-229.
- [9] Dumanski, J. 2004. Carbon sequestration, soil conservation, and the Kyoto Protocol: Summary of implications, *Climatic Change*, 65, pp 255-261.
- [10] Cléménçon, R. 2008. The Bali road map: A first step on the difficult journey to a Post-Kyoto Protocol agreement, *The Journal of Environment Development*, 17, pp 70-94.
- [11] Bohringer, C. 2003. The Kyoto Protocol: A review and perspectives, *Oxford Review of Economic Policy*, 19, pp 451-466.
- [12] Parry, I.W.H. 2003. Fiscal interactions and the case for carbon taxes over grandfathered carbon permits, *Oxford Review of Economic Policy*, 19, pp 385-399.
- [13] Helm, D., Hepburn, C. & Mash, R. 2003. Credible carbon policy, *Oxford Review of Economic Policy*, 19, pp 438-450.
- [14] Callan, T., Lyons, S., Scott, S., Tol, R.S.J. and Verde, S. 2009. The distributional implications of a carbon tax in Ireland, *Energy Policy*, 37, pp 407-412.
- [15] Keppens, M. & Vereeck, L. 2003. The design and effects of a tradable fuel permit system, *Association for European Transport*, presented at the European Transport Conference.
- [16] Watters, H. & Tight, M. 2007. Designing an emissions trading scheme suitable for surface transport, Institute for Transport Studies, Faculty of Environment, University of Leeds.
- [17] Kengpol, A. 2008. Design of a decision support system to evaluate logistics distribution network in Greater Mekong Sub-region countries, *International Journal of Production Economics*, 115, pp 388-399.
- [18] Ma, H. & Suo, C. 2006. A model for designing multiple products logistics networks, *International Journal of Physical Distribution & Logistics Management*, 36, pp 127-135.
- [19] Chopra, S. & Meindl, P. 2007. *Supply chain management strategy: Planning and operations*. 3rd ed., Pearson Education, Inc., New Jersey.
- [20] Canel, C. & Khumawala, B.M. 1996. A mixed-integer programming approach for the international facilities location problem, *International Journal of Operations & Production Management*, 16, pp 49-68.
- [21] Ostermark, R. 2007. A flexible platform for mixed-integer non-linear programming problems, *Kybernetes*, 36, pp 652-670.
- [22] UNEP and UNCTAD. 2003. An emerging market for the environment: A guide to emissions trading, UNEP Collaborating Centre on Energy and Environment (UCCEE).

- [23] **Dobes, L.** 1998. Tradable permits in transport, Conference on 'Kyoto - the Impact on Australia', Australian APEC Study Centre, Melbourne.
- [24] **Watters, H.** 2005. Tradable carbon permits: Reducing CO₂ from the transport sector, Presentation at European Transport Conference, Strasbourg.
- [25] **Starkey, R. & Anderson, K.** 2005. Domestic tradable quotas: A policy instrument for reducing greenhouse gas emissions from energy use, *Tyndall Technical Report 39*, Tyndall Centre for Climate Change Research.
- [26] **Waters, D.** 2007. *Global logistics: News directions in supply chain management*, 5th ed., Kogan Page Limited, London.
- [27] **Wadud, Z., Noland, R.B. & Graham, D.J.** 2008. Analysis of personal tradable carbon permits for the road transport sector, *Environmental Science & Policy*, 11, pp 533-544.
- [28] **Raux, C.** 2004. The use of transferable permits in transport policy, *Transportation Research Part D*, 9, pp 185-197.
- [29] **Angell, L.C. and Klassen, R.D.** 1999. Integrating environmental issues into the mainstream: An agenda for research in operations management, *Journal of Operations Management*, 17, pp 575-598.
- [30] **Robert, L. & Bradley, R.L.** 2003. *Climate alarmism reconsidered*, Institute of Economic Affairs, London.
- [31] **Sadegheih, A.** 2010. A novel formulation of carbon emissions costs for optimal design configuration of system transmission planning, *Renewable Energy*, 35, pp. 1091-1097.